

# Jlinks Technology

The Solution to CCTV Security



# Complete Solution to CCTV










JLINKS









# CAMERAs




# Indoor Cameras Solution

	Model Name	Fix Lens	Vari-Focal	IR LEDs	High/ Med Res	Weather/ Vandal Resist
	<b>JV-301</b>	v			Med Res	
	<b>JV-390</b>	v			High Res	
	<b>JV-392</b>		v		High Res	v.
	<b>JL-136C</b>	v		v	High Res	w.
	<b>JL-138C</b>	v		v	High Res	w.
	<b>JV-910</b>	v		v	H / M Res	w.v.
	<b>JL-133C</b>	v		v	High Res	







# Outdoor 901 Dome Series Solution

Model Name	Fix Lens	Vari-Focal	IR LEDs	ICR	High/ Med Res	Weather/ Vandal Resist
 JV-901V37V12		v			Med Res	v
 JV-901HF36	v				High Res	v
 JV-901HV37V12/ JV-901HV28V10		v			High Res	v
 JV-901HIRF36/ JV-901IRF36	v		v		High Res	v
 JV-901ICRV37V12		v	v	v	Med Res	v
 JV-901HICRV37V12/ JV-901HICRV28V10		v	v	v	High Res	v
 JV-901HV37V12DNR/ JV-901HV37V12DNRT		v			High Res	v





# Outdoor 903/905 Dome Solution

Model Name	Fix Lens	Vari-Focal	IR LEDs	ICR	High/ Med Res	Weather/ Vandal Resist
 <b>JV-903F36</b>	v				Med Res	v
 <b>JV-903IRF36/ JV-903HIRF36</b>	v		v		H / M Res	v
 <b>JL-905IRF36</b>	v		v		Med Res	v

# Sony 3D DNR Series Solution

Star Light Camera s (0.001 lux under b/w mode 0.01 lux under color mode)	Vari- Focal	Dual Voltage	High/ Med Res	WDR/ DNR	Heater Built-in	Weather/ Vandal Resist
 <b>JV-902HV37V12DNR</b>	v	v	High	DNR		v
 <b>JV-902HV37V12DNRT</b>	v	DC12 Only	High	DNR	v	v
 <b>JV-B765HV37V12DNR</b>	v	v	High	DNR		Weather Proof Only
 <b>JV-B765HV9V22DNR</b>	v	v	High	DNR		v
 <b>JV-BC02DNR</b>	v	v	High	DNR		Indoor Use Only
 <b>JV-902HV37V12WDRT (with built-in heater)</b>	v	DC12 Only	High	DNR & WDR	v	v

# WDR Camera Solution

Model Name	Vari-Focal	TVL	IR	Low Lux	Dual Voltage	Weather/ Vandal Resist
 JV-WD01	v	480			v	Indoor Use Only
 JL-WD03	v	540	v		v	v
 JV-902HV37V12WDR	v	560		v	DC12 Only	v
 JL-WD04	v	680	v	v	DC12 Only	v

# Bullet Camera Series Solution

Model Name	Fix Lens	Vari-Focal	IR LEDs	ICR	High/ Med Res	Weather Proof
JV-B700HQ			v		Med Res	v
JV-B730F36 / JV-B730HQQF36	v		v		High Res	v
JV-B750HQ		v	v		High Res	v
JV-B751HQ (Black / White)	v		v		High Res	v
JV-B761HQV37V12/ JV-B761HQQV9V22		v	v	v	Med Res	v
JV-B601		v	v	v	High Res	v
JV-B765HV37V12DNR/ JV-B765HV9V22DNR		v	v		High Res	v









# Box Camera Series Solution





Model Name	Lens Type	TVL	Bulit-in Vari-Focal	Dual Voltage	WDR	Indoor Use
<b>JV-101</b>	Sony Ex-view	550		v		v
<b>JV-BC03H</b>	Sony Super HR	550		v		v
<b>JV-WD01</b>	Sony WDR	480		v	v	v
<b>JL-BCHV37V12</b>	Sony Super HR	520	v	v		v
<b>JV-BC02DNR</b>	Sony Star-light 3D DNR	560		v		v











# Hidden Camera Series Solution

Model Name	Lens	Wide Angel	Low Lux	TVL	Audio	Weather/ Vandal Resist
 <b>JV-851P / JV-851AP</b>	Sony CCD Pinhole			420	V (851AP)	
 <b>JV-855</b>	Sony HDD CCD	v (1.6m m)		480		v
 <b>JV-801 / JV-801S / JV-801HQS</b>	Sony PIR			JV-801 & JV-801S = 420 TVL JV-801HQS = 520 TVL		
 <b>JV-831 / JV-831A</b>	Sony CCD			420		
 <b>JL-HS560DNR</b>	Sony Star-Light CCD		v	560		v
 <b>JL-HS480</b>	Sony CCD Pinhole			480		

# WDR Camera Solution

Model Name	Vari-Focal	TVL	IR	Low Lux	Dual Voltage	Weather/ Vandal Resist
 JV-WD01	v	480			v	Indoor Use Only
 JL-WD03	v	540	v		v	v
 JV-902HV37V12WDR	v	560		v	DC12 Only	v
 JL-WD04	v	680	v	v	DC12 Only	v

# PTZ Camera Solution

Model Name	Lens Type	TVL	Zoom In Feature	Dimension	Mounting Bracket (Included)	PTZ Controller Suggestions
 <b>JV-SPD01</b>	1/4" Color Sony Super HAD	480/600	23x	420 x Φ200mm 	Wall Mount	 Small Size Controller
 <b>JV-SPD02</b>	1/3" Sony Color Super HAD	420	3.7~12mm Vari-focal	187 x Φ127mm 	Ceiling Mount	 Full Size Controller
 <b>JV-SPD03</b>	1/4" Sony Color Super HAD CCD	480	10x	187 x Φ127mm 	Ceiling Mount	




















DVRs

# 4 Channel DVR Solution






Model Name	Compression Types	USB #	Data Back-Up	Network Feature	3G Support	Dual Streaming	Mouse / Remote Control
 DVR401	MJPEG	2	USB				v
 DVR410	MJPEG	1	USB				
 DVR-411	MJPEG	1	USB				Remote Only
 DVR-411W	MJPEG	1	USB	v			Remote Only
 DVR782	MPEG-4	1	USB/ CD	v			Remote Only
 JV-264-004M	H.264	1	USB	v			v
 JV-264-004L	H.264	1	USB	v	v		v
 <b>NEW</b> JV-264-204L	H.264	2	USB	v	v	v	v
 JV-264-104L	H.264	1	USB	v	v		v
 JV-264-4	H.264	1	USB / DVD/RW (optional)	v	v		v

# 8 Channel DVR Solution

Model Name	Compressi on Types	USB #	Data Back-Up	Network Feature	3G Support	Dual Streaming	Mouse / Remote Control
 DVR810	MJPEG	0	Compact Flash				
 DVR-S008	MJPEG	2	USB	v			v
 DG824	MPEG-4	1	USB/ DVD/RW	v	v	v	
 JV-264-8	H.264	1	USB/ DVD/RW (optional)	v	v		v
 JV264-208	H.264	2	USB/ DVD/RW (optional)	v	v	v	v



# 16 Channel DVR Solution










Model Name	Compression Types	USB #	Data Back-Up	Network Feature	3G Support	Dual Streaming	Mouse / Remote Control
 DVR1610	MJPEG	0	Compact Flash				
 JV-264-16	H.264	1	USB/DVD/RW	v	v		v
 JV264-216	H.264	2	USB/DVD/RW	v	v	v	v





# LCDs & Testing Monitors













# Security Monitor Solution

Model Name	LCD Size	Best Suitable Use with ____	Special Order Require	Other Bracket Accessories
 JL-LCD-15	15"	4 channels system		 JLA-BRKLCD1
 JL-LCD-17	17"	4~8 channels system		 JLA-BRKLCD2
 JL-LCD-19	19"	8~16 channels system		 JLA-BRKLCD4
 JL-LCD-22	22"	16 channel system	v	
 JL-LCD35	3.5"	Testing Monitor Use		
 JL-LCD56	5.6"	Testing Monitor Use		













# Power Supply

# Individual Power Supply Solution

Model Name	Output Current (Max)	DC / AC	Generally Suggest for Using When	Certification	Remark	
 JLA-PSU0.5A	0.5A	DC12	1x Camera built-in without IR			
 JLA-PSU1.0A	1.0A	DC12	1x Camera built-in with IRs			
 JLA-PSU1.5A	1.5A	DC12	1x Camera built-in with large # quantity of IRs			
 JLA-PSU2.1A	2.1A	DC12	Bullet cameras built-in with IRs and Heater			
 JLA-PSU3A	3.0A	DC12	Multiple Cameras			
 JLA-PSU5A	5.0A	DC12	Multiple Cameras			
 JLA-241660A	1.6A	AC24	AC power			
 JLA-PS7A-BP	3.5A	DC12	Power Testing / Installation		Rechargeable Battery Pack with Charger	











# Power Supply Box Solution

Model Name	Individual Output Current (Max)	DC / AC	Certification	Accessories to go with
 <b>JLA-124DC-25</b>	500mA *4	DC12	    	
 <b>JLA-128DC-50</b>	500mA *8	DC12		
 <b>JLA-1216DC-100</b>	500mA *16	DC12		
 <b>JLA-124AC-25</b>	500mA *4	AC24		
 <b>JLA-248AC-100</b>	500mA *8	AC24		
 <b>JLA-2416AC-200</b>	500mA *16	AC24		



# Connector

# Connectors

	Model Name	Description		Model Name	Description
	<b>JLA-CON1</b>	RCA Female to RF Male		<b>JLA-CON6</b>	RCA Male to BNC Male
	<b>JLA-CON2</b>	BNC Female TO RF Male		<b>JLA-CON7</b>	RF Male to BNC Male
	<b>JLA-CON3</b>	BNC Female to Female Connector		<b>JLA-CON8</b>	RF Female to BNC Male
	<b>JLA-CON4</b>	RCA Female to BNC Male		<b>JLA-CON9</b>	RF Female to RCA Male
	<b>JLA-CON5</b>	BNC Female to RCA Male		<b>JLA-CON10</b>	Crimp-on 59 Connector

# Connectors

	Model Name	Description		Model Name	Description
	<b>JLA-CON11</b>	Twist-On BNC RG59 Connector		<b>JLA-CON18</b>	WATERPROOF (SNAP & SEAL) CONNECTOR FOR RG-59
	<b>JLA-CON12</b>	Twist-On BNC RG6 Connector		<b>JLA-CON19</b>	BNC Male to Double Female
	<b>JLA-CON15</b>	Lock & Seal BNC Connector for RG59 W/self seizing		<b>JLA-CON20</b>	BNC Male to BNC Male
	<b>JLA-CON16</b>	Lock & Seal BNC Connector for RG6 W/self seizing pin		<b>JLA-CON21</b>	Rectangle RG59 Compression
	<b>JLA-CON17</b>	WATERPROOF (SNAP & SEAL) CONNECTOR FOR RG-6		<b>JLA-TL-01</b> <b>JLA-TL-02</b>	-Adjustable Compression tool for RG59 / 6 & 11 -Coaxial Cable Stripper for RG58 /59 /6 /62



# Mirror, Label, & Warning Sign

# Mirror, Label, & Warning Sign









Model Name	Description	Size
<b>JLA-CGM45</b>	Convex glass mirror for safety and security	45cm / 18"
<b>JLA-CGM60</b>	Convex glass mirror for safety and security	60cm / 24"
<b>JLA-SIGN1</b>	Warning Sign	10" x 10"
<b>JLA-STICKER 1</b>	Warning Sticker	4" x 4"
<b>JLA-STICKER 2</b>	Warning Sticker	6" x 6"
<b>JLA-STICKER 3</b>	Warning Sticker (Front-sided decal)	4" x 4"



# UTP Solutions

# Balun Solution



Model Name	Description	Remark
	Video Transceiver BNC Male To Terminal Block	Screw Terminal Type
	Video Transceiver BNC Male to RJ45 Female	RJ45 Type
	Video Transceiver with 10cm power cord	10cm Power Cord
	Video Transceiver BNC Male to RJ45 Female with 25cm power cord	RJ45 Female with 25cm Power Cordd
	Video Transceiver BNC Male to RJ45 Female With Power cord	RJ45 Female with Power Cord
	16 Port Passive Video Transceiver Hub in 1U Rack Mounting Panel	

# Video Distributors Solution



Model Name	Description	Remark
<b>VA102</b>	Video Distribution: 1 in 2 out	
<b>VA104</b>	Video Distribution: 1 in 4 out	
<b>VA108</b>	Video Distribution: 1 in 8 out	
<b>VA408</b>	Video Distribution: 4 in 8 out	
<b>VA1664</b>	16 IN 64 OUT Video Distributor	
<b>VAP101</b>	Video Distribution Amplifier : 1 in 1 out	Built-in Amplifier
<b>VAP404</b>	Video Distribution Amplifier : 4 in 4 out	Built-in Amplifier
<b>VAP408</b>	Video Distribution Amplifier: 4 in 8 out	Built-in Amplifier
<b>VAP816</b>	8 IN 16 OUT Video Distributor Amplifier	Built-in Amplifier

# Power Converter Solution

Model Name	Description	Remark
 <b>PC1A</b>	Power Converter 1amp	
 <b>PCIAU</b>	AC to DC/ DC to DC Power Converter, DC12V 1000mA	



# Brackets & Housing

# Brackets



Model Name	Description	Remark
<b>JLA-VDH</b>	Anti-Theft Vandal dome camera protection cover	901 Dome Series Use Only
<b>JLA-BRK6</b>	Dome Bracket (Indoor Dome Only)	Indoor Dome Series Use
<b>JLA-BR-972</b>	Dome Bracket (Outdoor Heavy Duty )	Outdoor Dome Series Use
<b>JLA-BRK3</b>	Bracket (Small, Metal, Silver)	Bracket for Bullet Cam Use (Small, Metal, Silver)
<b>JLA-BRK4</b>	Bracket (Large Size, Metal, Easy Adjustment, Sliver )	Bracket for Bullet Cam Use (Large Size, Metal, Easy Adjustment, Sliver)
<b>JLA-BRK7</b>	Outdoor Housing Bracket (Size: 293X99X86m/m)	Bracket for Heater Housing and Bullet Cam Use
<b>JLA-BRK7L</b>	Outdoor Housing Bracket (Size: 285X99X86m/m)	Bracket for Heater Housing and Bullet Cam Use
<b>JLA-BRK8</b>	Outdoor Housing Bracket (L Type Bracket)	Bracket for Heater Housing and Bullet Cam Use
<b>JLA-BRK9</b>	Outdoor Aluminum Bracket (silver)	Bracket for Heater Housing, Bullet and Box Cam Use


# Housing





Model Name	Description	Remark
<b>JLA-606HB</b>	Outdoor Housing with heater and blower: Size: 410X118X107m/m (AC 24V)	
<b>JLA-615</b>	Vandal Proof Dome Housing	
<b>JV-901</b>	Vandal Proof Dome Housing	
<b>JV-392</b>	Vandal Proof Indoor Dome Housing	Available in Black or White Housing




# Wiring Accessories

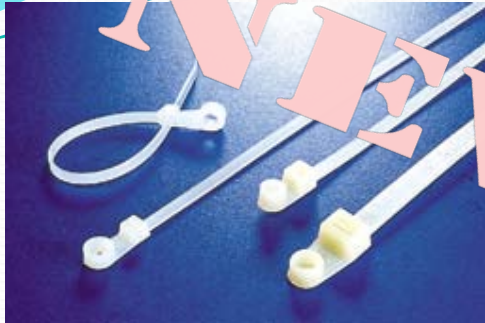

	L (mm)	W (mm)	A (mm)	Max. Bundle Dia. (mm)	Min. Tensile Strength	
					Lb	Kg
<b>TCV-100 (White)</b>	113	2.5	3.2	25	18	8
<b>TCV-155 (White)</b>	171.5	3.7	5.2	40	40	18
<b>TVC-155 (Black)</b>	171.5	3.7	5.2	40	40	18
<b>TCV205(White)</b>	221.3	4.2	5.2	60	50	22
<b>TCV205 (Black)</b>	221.3	4.2	5.2	60	50	22
<b>TCV- 370(White)</b>	370	4.8	4.9	102	50	22
<b>TCV -370(Black)</b>	370	4.8	4.9	102	50	22

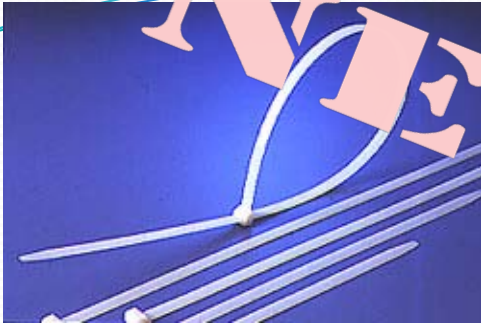

	L (mm)	W (mm)	A (mm)	Max. Bundle Dia. (mm)	Min.Tensile Strength	
					Lb	Kg
CV-200AW(White) 203x4.6	203	8"	3.6	52	40	18
CV-200A(Black) 203x4.6	204	8"	3.6	52	40	18
CV-140SW (White) 142x3.2	142	5 1/2"	2.5	35	18	8
CV-140S (Black) 142x3.2	143	5 1/2"	2.5	35	18	8
CV280 (White) 280x4.8	280	11"	4.8	77	50	22
CV280 (Black) 280x4.8	281	11"	4.8	77	50	22

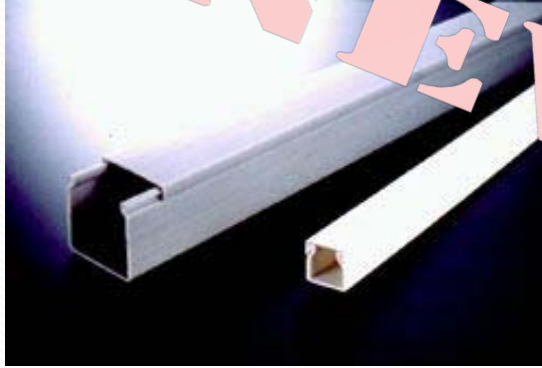


	Dimension L (mm)	Dimension W (mm)	Wires to be contained	Length
<b>SD-2516 Milk White</b>	<b>16</b>	<b>25</b>	<b>5~12pcs</b>	<b>2M</b>
<b>SDM-2516 (White)</b>	<b>MID-WAY CONNECTOR</b>			
<b>SDO-2516</b>	<b>OUTSIDE CORNER CONNECTOR</b>			
<b>SDT-2516</b>	<b>"T" TYPE CONNECTOR</b>			
<b>SDL-2516</b>	<b>"L" TYPE CONNECTOR</b>			
<b>SDI-2516</b>	<b>INSIDE CORNER CONNECTOR</b>			
<b>SDE-2516</b>	<b>INSIDE CORNER CONNECTOR</b>			



	Width (mm)	Height (mm)	Wire to be contained (0.8mm)	Length
<b>TF-4T Milk White</b>	<b>31.8(1 1/4")</b>	<b>11</b>	<b>6-12pairs</b>	<b>2M</b>
<b>TFO-4</b>	<b>OUTSIDE CORNER CONNECTOR</b>			
<b>TFM-4</b>	<b>MID-WAY CONNECTOR</b>			
<b>TFT-4</b>	<b>"T" TYPE CONNECTOR</b>			
<b>TFL-4</b>	<b>"L" TYPE CONNECTOR</b>			
<b>TFI-4</b>	<b>INSIDE CORNER CONNECTOR</b>			
<b>TFE-4</b>	<b>INSIDE CORNER CONNECTOR</b>			
<b>TF-2T Milk White (Glue)</b>	<b>19.0(3/4")</b>	<b>11</b>	<b>2-6pairs</b>	<b>2M</b>
<b>TFO-2</b>	<b>OUTSIDE CORNER CONNECTOR</b>			
<b>TFM-2</b>	<b>MID-WAY CONNECTOR</b>			
<b>TFT-2</b>	<b>"T" TYPE CONNECTOR</b>			
<b>TFL-2</b>	<b>"L" TYPE CONNECTOR</b>			
<b>TFI-2</b>	<b>INSIDE CORNER CONNECTOR</b>			
<b>TFE-2</b>	<b>OUTSIDE CORNER CONNECTOR</b>			

# AVENUE

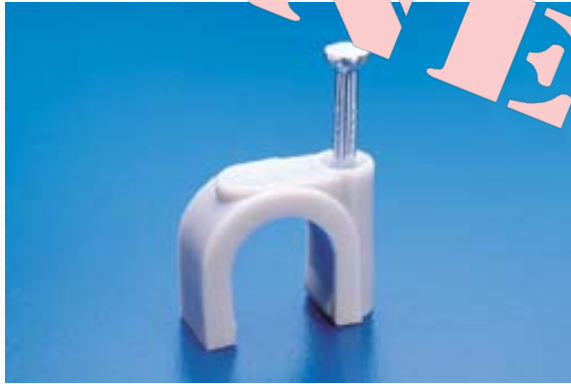

	<b>W</b>	<b>Outside H</b>	<b>Inside H</b>	<b>Nails</b>
<b>NC-0.5N (White)</b>	<b>5</b>	<b>7.6</b>	<b>5</b>	<b>2.5X18</b>
<b>NC-1NB (Black)</b>	<b>6</b>	<b>9</b>	<b>6.6</b>	<b>2.5X18</b>
<b>NC-1NS (White)</b>				
<b>NC-2NS (White)</b>	<b>8</b>	<b>12.9</b>	<b>9</b>	<b>2.0X25</b>
<b>NC-2NB (Black)</b>	<b>8</b>	<b>12.9</b>	<b>9</b>	<b>2.0X25</b>
<b>NC-3NS (White)</b>	<b>9.3</b>	<b>13.8</b>	<b>10.4</b>	<b>2.0X25</b>
<b>NC-3NS (Black)</b>				

# ANEXA



	<b>B</b>	<b>W</b>	<b>H</b>
<b>SW-72BH</b>	<b>7</b>	<b>9.8</b>	<b>17.6</b>
<b>SW-71BH</b>	<b>6.7</b>	<b>8.6</b>	<b>15.2</b>



Others

# TV Modulator Solution



**JLA-TV06S-1**

Digital TV Channel Modulator NTSC DC12V



**JLA-TVM01**

Video and Audio Signal to TV Modulator







**ITV-900**




PC to TV Converter

Model Name	Description	Remark
<b>JLA-TV06S-1</b>	Digital TV Channel Modulator NTSC DC12V	
<b>JLA-TVM01</b>	Video and Audio Signal to TV Modulator	
<b>ITV-900</b>	PC to TV Converter	

# Quad Processor Solution

Model Name	Description	Remark
 <b>JL-CQ401</b>	4CH Color Quad Processor with small case (with remote control)	With Remote Controller
 <b>JL-CQ801</b>	8CH Color Quad Processor (with remote control)	With Remote Controller
 <b>JL-CQ1601</b>	16CH Color Quad Processor (with remote control)	With Remote Controller
 <b>JL-CQ802</b>	8CH Color Quad Processor with loop and Alarm	No Remote Controller

# Other Solutions

Model Name	Description	Remark
 <b>JLA-VBT-VGA</b>	CAT5 VGA Extender	
 <b>VGA-01</b>	VGA Converter for DVR	
 <b>VGA-02</b>	Video to VGA Converter	

# Contact Us

**Telephone :**

+1 (604) 207-1662

**Toll Free Number:**

+1-866-JLINKS-1 ( 1-866-554-6571 )

**Fax:**

+1 (604) 207-1686

**Web Site :**

[www.jlinks.com](http://www.jlinks.com)

**Sales Inquiry:**

[sales@jlinks.com](mailto:sales@jlinks.com)

**Other Inquiry:**

[info@jlinks.com](mailto:info@jlinks.com)

**Address :**

328-13988 Cambie Road Richmond, BC Canada V6V2K4

**Business Hours :**

Monday ~ Friday from 9am ~ 5:30pm

Thank you from JLINKS and for visiting our online service. We have received your inquiry.

One of our Customer Service Representatives will begin work on your request shortly. We appreciate that your time is valuable and will take great care to provide you with a thorough response as soon as possible.

If your request is urgent, please call us at 1-866-JLINKS-1.